
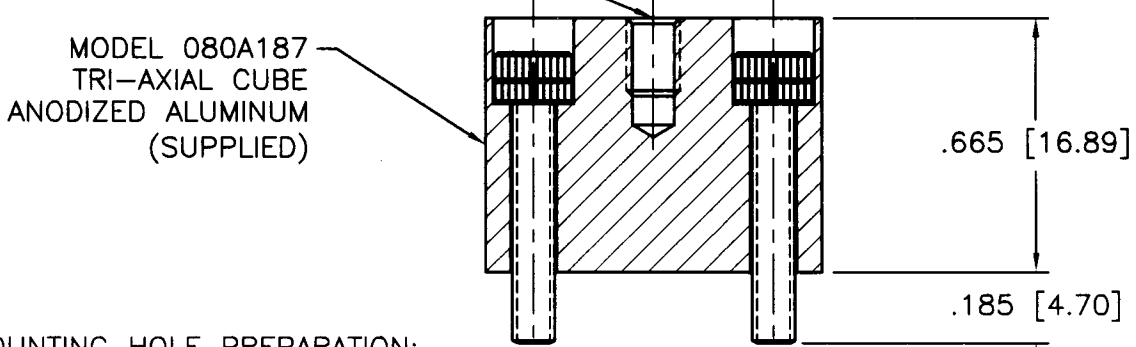
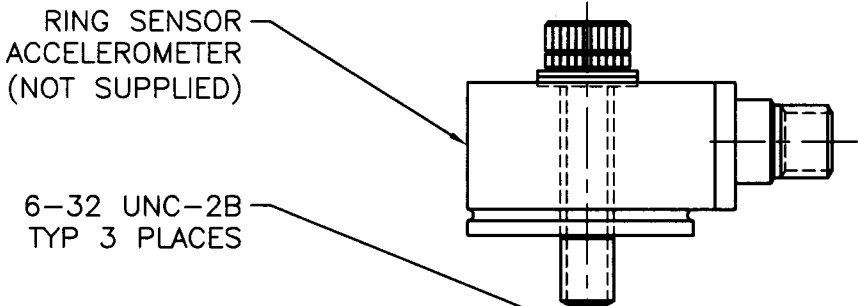


APPLICATION			REVISIONS				
NEXT ASS'Y	USED ON	VAR	REV	DESCRIPTION	ECN	DATE	APP'D

19325

PCB Piezotronics Inc. claims proprietary rights in the information disclosed hereon. Neither it, nor any reproduction thereof will be disclosed to others without written consent of PCB Piezotronics Inc.

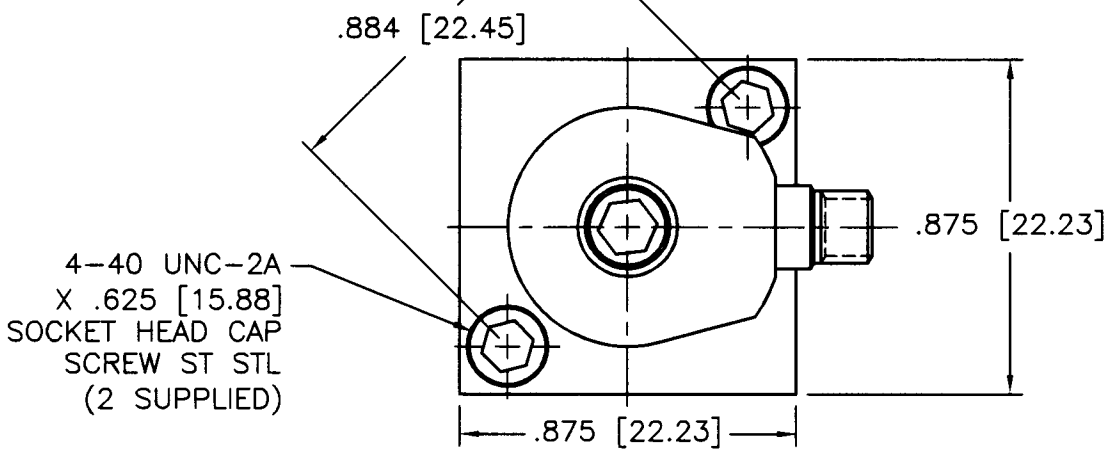

MOUNTING HOLE PREPARATION:

- Ø.090 [Ø2.29]
- X .340 [8.64] ∇
- TAP 4-40 UNC-2B
- X .260 [6.60] ∇
- TYP 2 PLACES

▲ MOUNTING SURFACE MUST BE FLAT WITHIN .001 [0.03]
TIR OVER Ø1.25 [Ø31.7] WITH A MIN 63/ [1.6/].

UNLESS SPECIFIED TOLERANCES		DRAWN	5/2/02	MFG	WDS	5/28/02	PCB PIEZOTRONICS™ 3425 WALDEN AVE. DEPEW, NY 14043 (716) 684-0001 EMAIL: SALES@PCB.COM
DIMENSIONS IN INCHES	DIMENSIONS IN MILLIMETERS [IN BRACKETS]	CHK'D	em	ENGR	DMO	5/28/02	
DECIMALS XX ±.01	DECIMALS XX ±0.3	APP'D	1/3	SALES	WDC	5/28/02	CODE IDENT. NO. 52681
XXX ±.005	XXX ±0.13	TITLE	INSTALLATION DRAWING MODEL 080A187 TRI-AXIAL CUBE				DWG. NO. 19325
ANGLES ±2 DEGREES	ANGLES ±2 DEGREES						SCALE: 2X
FILLETS AND RADII .003 - .005	FILLETS AND RADII [0.07 - 0.13]						SHEET 1 OF 1
DD011 REV. B 03/13/98							