

	ENGLISH	SI	
Performance			
Sensitivity(± 5 %)	100 mV/g	10.19 mV/(m/s ²)	[1]
Measurement Range	± 50 g pk	± 491 m/s ² pk	
Frequency Range(± 5 %)	1 to 4,000 Hz	1 to 4,000 Hz	
Frequency Range(± 10 %)	0.7 to 7,000 Hz	0.7 to 7,000 Hz	
Frequency Range(± 3 dB)	0.35 to 12,000 Hz	0.35 to 12,000 Hz	
Resonant Frequency	≥ 22 kHz	≥ 22 kHz	
Broadband Resolution(1 to 10,000 Hz)	0.0005 g rms	0.005 m/s ² rms	[2]
Non-Linearity	≤ 1 %	≤ 1 %	[3]
Transverse Sensitivity	≤ 5 %	≤ 5 %	[4]
Environmental			
Overload Limit(Shock)	± 10,000 g pk	± 98,100 m/s ² pk	
Temperature Range(Operating)	-65 to +250 °F	-54 to +121 °C	
Temperature Response	See Graph	See Graph	[2]
Base Strain Sensitivity	0.0002 g/µε	0.002 (m/s ²)/µε	[2]
Electrical			
Excitation Voltage	20 to 30 VDC	20 to 30 VDC	
Constant Current Excitation	2 to 20 mA	2 to 20 mA	
Output Impedance	≤ 100 Ohm	≤ 100 Ohm	
Output Bias Voltage	7.5 to 12.0 VDC	7.5 to 12.0 VDC	
Discharge Time Constant	0.5 to 2.0 sec	0.5 to 2.0 sec	
Settling Time(within 10% of bias)	< 25 sec	< 25 sec	
Spectral Noise(1 Hz)	320 µg/√Hz	3,139 (µm/sec ²)/√Hz	[2]
Spectral Noise(10 Hz)	70 µg/√Hz	687 (µm/sec ²)/√Hz	[2]
Spectral Noise(100 Hz)	18 µg/√Hz	177 (µm/sec ²)/√Hz	[2]
Spectral Noise(1 kHz)	6.4 µg/√Hz	63 (µm/sec ²)/√Hz	[2]
Insulation Resistance	See Graph	See Graph	
Physical			
Size (Height x Hex)	1.26 in x 0.75 in	32.0 mm x 19.1 mm	
Weight	0.96 oz	27 gm	[2]
Sensing Element	Quartz	Quartz	
Sensing Geometry	Shear	Shear	
Housing Material	Titanium	Titanium	
Sealing	Welded Hermetic	Welded Hermetic	
Electrical Connector	10-32 Coaxial Jack	10-32 Coaxial Jack	
Electrical Connection Position	Top	Top	
Mounting Thread	10-32 Female	10-32 Female	

OPTIONAL VERSIONS		
Optional versions have identical specifications and accessories as listed for the standard model except where noted below. More than one option may be used. [1]		
B - Low bias electronics		
Output Bias Voltage	4.5 to 7.5 VDC	4.5 to 7.5 VDC
Excitation Voltage	12 to 30 VDC	12 to 30 VDC
Constant Current Excitation	1 to 20 mA	1 to 20 mA
Measurement Range	± 30 g pk	± 294 m/s ² pk
J - Ground Isolated		
Frequency Range ± 5 %	1 to 4,000 Hz	1 to 4,000 Hz
Frequency Range ± 10 %	0.7 to 6,000 Hz	0.7 to 6,000 Hz
Resonant Frequency	≥ 18 kHz	≥ 18 kHz
Electrical Isolation(Base)	≥ 10 ⁸ Ohm	≥ 10 ⁸ Ohm
Size - Hex	0.75 in	19.1 mm
Size - Height	1.23 in	31.2 mm
Q - Extended discharge time constant		
Frequency Range ± 5 %	0.1 to 4,000 Hz	0.1 to 4,000 Hz
Frequency Range ± 10 %	0.07 to 7,000 Hz	0.07 to 7,000 Hz
Discharge Time Constant	≥ 10 sec	≥ 10 sec
Settling Time(within 10% of bias)	< 120 sec	< 120 sec
Supplied Accessory: Model ACS-4 Single axis, low frequency phase and amplitude response cal from 0.5 to 10 Hz (1)		
W - Water Resistant Cable		
Electrical Connector	Sealed Integral Cable	Sealed Integral Cable
Electrical Connection Position	Top	Top

NOTES:
 [1] B and Q options supplied with a sensitivity tolerance of ± 10 %.
 [2] Typical.
 [3] Zero-based, least-squares, straight line method.
 [4] Transverse sensitivity is typically ≤ 3%.
 [5] See PCB Declaration of Conformance PS023 for details.


SUPPLIED ACCESSORIES:
 Model 080A109 Petro Wax (1)
 Model 080A12 Adhesive Mounting Base (1)
 Model 081B05 Mounting Stud (10-32 to 10-32) (1)
 Model ACS-1 NIST traceable frequency response (10 Hz to upper 5% point). (1)
 Model M081B05 Mounting Stud 10-32 to M6 X 0.75 (1)

Entered: ND	Engineer: BAM	Sales: KK	Approved: NJF	Spec Number:
Date: 08/19/2024	Date: 08/19/2024	Date: 08/19/2024	Date: 08/19/2024	353-2340-80


PCB PIEZOTRONICS
 AN AMPHENOL COMPANY

Phone: 716-684-0001
 Fax: 716-684-0987
 E-Mail: info@pcb.com

3425 Walden Avenue, Depew, NY 14043

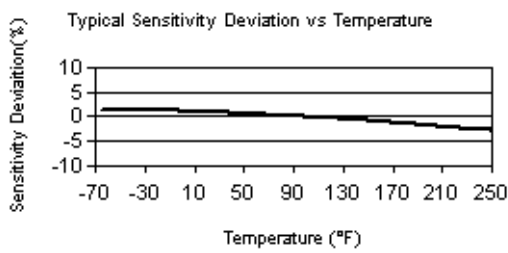

All specifications are at room temperature unless otherwise specified.
 In the interest of constant product improvement, we reserve the right to change specifications without notice.
 ICP® is a registered trademark of PCB Piezotronics, Inc.