
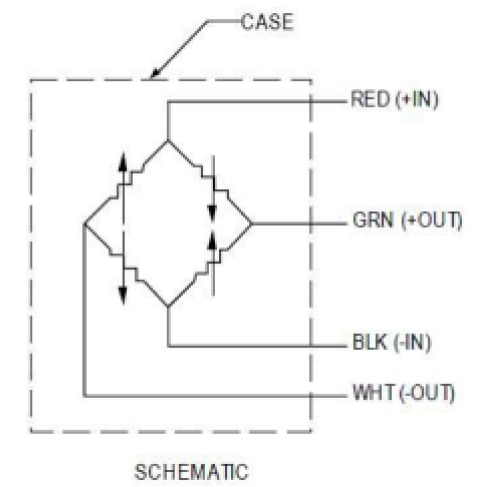


79467

PCB Piezotronics of NC, Inc. (DBA Endevco) claims proprietary rights in the information disclosed hereon. Neither it nor any reproduction thereof will be disclosed to others without the written consent of PCB Piezotronics of NC, Inc. (DBA Endevco)

REVISIONS		
REV	DESCRIPTION	DIN
NR	RELEASED TO DRAFTING	55158

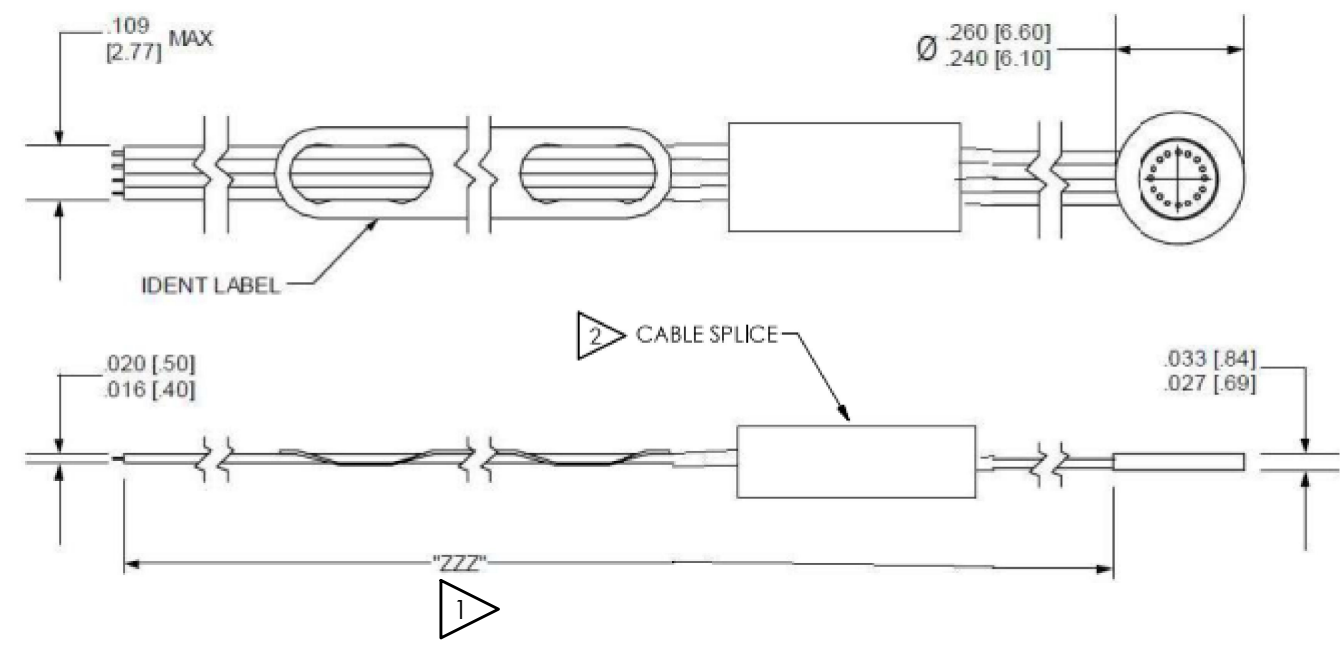

3.) RECOMMENDED MOUNTING METHOD (ELASTOMER MOUNTING) IS .002"-.005" THICKNESS OF RTV ADHESIVE, SUCH AS DOW CORNING SILASTIC® OR GENERAL ELECTRIC RTV 118. AN ALTERNATE MOUNT (RIGID MOUNT) MAY BE UTILIZED USING CYANOACRYLATE.

CAUTION: USE OF A RIGID ADHESIVE MAKES REMOVAL OF TRANSDUCER WITHOUT DAMAGE DIFFICULT  
 CAUTION: USING SOLVENT TO REMOVE THE ADHESIVE, MAY DAMAGE INTERNAL JOINTS TO THE UNIT.

2) CABLE SPLICE USED ON CABLE LENGTHS GREATER THAN 36 INCHES

1) ZZZ = CABLE LENGTH IN INCHES

A.) IF NO CABLE LENGTH SPECIFIED, THE DEFAULT IS 30 INCHES

B.) IF THE CABLE IS GREATER THAN 36 INCHES, A SPLICE WILL BE APPLIED AT THE 30 INCH LOCATION

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:		DRAWN		CHECKED		ENGINEER	
DIMENSIONS IN INCHES DECIMALS XX ±.03 XXX ±.010 ANGLES ± 2 DEGREES	DIMENSIONS IN MILLIMETERS [ IN BRACKETS ] DECIMALS X ± 0.8 XX ± 0.25 ANGLES ± 2 DEGREES	PST	11/5/24	JDM	11/5/24	BAB	11/5/24
CABLE TOLERANCES IN ENGLISH 1' ≤ LENGTH < 1' = +1' / - 0 1' ≤ LENGTH < 5' = +2' / - 0 5' ≤ LENGTH < 100' = +6' / - 0 100' ≤ LENGTH = +1' / - 0	CABLE TOLERANCES IN METRIC 2.54cm ≤ LENGTH < 30.5cm = +2.54cm / - 0 30.5cm ≤ LENGTH < 1.5m = +5.1cm / - 0 1.5m ≤ LENGTH < 30.5m = +15.2cm / - 0 30.5m ≤ LENGTH = +30.5cm / - 0	TITLE OUTLINE DRAWING 8515 PR-PRESSURE					
FILLETS AND RADII .003 - .005	FILLETS AND RADII 0.07 - 0.13	CODE IDENT. NO. BDN13		DWG. NO. 79467		SCALE: FULL SHEET 1 OF 1	

**ENDEVCO**  
 AN AMPHENOL COMPANY  
 PCB PIEZOTRONICS OF NC, INC (DBA ENDEVCO)  
 10869 NC HIGHWAY 903, HALIFAX, NC 27839